



unilli **TYRE**



CATALOG

- 04 SCOOTER STREET
- 17 SCOOTER DUAL SPORT
- 19 SCOOTER RADIAL
- 20 MOTORCYCLE HIGH SPEED
- 25 MOTORCYCLE STREET
- 32 MOTORCYCLE DUAL SPORT
- 37 MOTOCROSS
- 40 ATV & UTV
- 45 SLICK KART
- 47 DIRT & RAIN KART



COMPANY INTRODUCTION

Acme Rubber Ind. Co., Ltd. a subsidiary of Unilli Motor Co., Ltd. is a specialized manufacturer of tyres. We produce various kinds and sizes of pneumatic rubber tyres and sell them to all over the world.

Tyre is a capital intensive and technical intensive industry.

Acme Rubber Ind. Co., Ltd has advanced equipments, perfect developments and quality examination and high efficient management. We insist that quality is the most Important thing, and supply customers with the best products. We keep designing new products to meet market demands due to rapidly market change.

Though we are not the most famous tyre manufacturer, we have team of professional technicians & marketing staffs that we can supply you any products you require from us. Acme Rubber Ind. Co., Ltd is your best choice.

A-2000

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

DT-161

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	220
120/70-12	51L	122	4.8	473	18.6	3.5	195	430	32	220
130/70-12	56L	129	5.1	487	19.2	3.5	224	494	32	220

DT-167

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250

DT-170

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

DT-888

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

GT1**CITY SMART**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

GT2

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

**FOR
SCOOTER
STREET**

**O-300**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**P-500**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**P-600**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**P-2006**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**S-05**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**S-097**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	97	3.8	434	17.1	2.5	224	494	36	250

**S-099**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10 (80/90-10)	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	97	3.8	434	17.1	2.5	224	494	36	250

**TH-557A**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-12	54L	92	3.6	464	18.3	2.15	212	467	36	250

TH-557N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	98	3.9	436	17.2	2.5	195	430	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/80-10	58L	100	3.9	422	16.6	2.5	206	454	36	250
100/90-10	56L	101	4.0	436	17.2	2.5	224	494	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

TH-558A**RACING COMPOUND**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51L	98	3.9	436	17.2	2.5	195	430	36	250
90/90-10	50L	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56L	101	4.0	436	17.2	2.5	224	494	36	250
100/90-12	59L	101	4.0	485	19.1	2.5	243	536	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250

TH-558N**SPORT COMPOUND**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	98	3.9	436	17.2	2.5	195	430	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

UN-100A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/80-12	50L	90	3.5	449	17.7	2.15	190	419	36	250
90/90-12	54L	90	3.5	467	18.4	2.15	212	467	36	250

UN-100N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**UN-168A**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/80-8 (3.00-8)	4	82	3.3	354	14	1.85	155	342	32	225
90/80-10	4	90	3.5	398	15.7	2.15	175	386	36	250

UN-169

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
80/80-10	41J	80	3.1	382	15.0	1.85	145	320	36	250
80/90-10	44J	80	3.1	398	15.7	1.85	160	353	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250
140/70-12	60L	139	5.5	501	19.7	3.75	250	551	32	225
110/90-13	56P	109	4.3	528	20.8	2.5	218	481	32	225
120/70-13	53P	122	4.8	498	19.6	3.5	206	454	32	225
130/70-13	57P	129	5.1	512	20.2	3.5	230	507	32	225

UN-173

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/90-12	64L	112	4.4	513	20.2	2.5	280	617	36	250
120/70-14	55S	124	4.9	530	20.9	3.5	218	481	32	225
120/80-14	58P	120	4.7	552	21.7	2.75	236	520	32	225

**UN-175**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
140/60-13	57S	136	5.4	504	19.8	3.75	230	507	32	225
150/70-13	64S	150	5.9	544	21.4	4.25	280	617	32	225
110/80-14	53P	112	4.4	536	21.1	2.5	206	454	32	225
150/70-14	66S	152	6.0	566	22.3	4.25	300	661	32	225

**UN-501**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

**UN-501A**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/80-10	58L	109	4.3	430	16.9	2.5	236	520	36	250

**UN-501F**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	225



UN-502

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	80	3.1	413	16.3	2.15	150	331	36	250
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
80/90-10	44J	80	3.1	398	15.7	1.85	160	353	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250



UN-502A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/80-8 (3.00-8)	4	82	3.3	354	14	1.85	155	342	32	225
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/80-10	53L	101	4.0	414	16.3	2.5	206	454	36	250
80/100-10	50J	80	3.1	414	16.3	1.85	190	419	36	250



UN-502N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	80	3.1	413	16.3	2.15	150	331	36	250



UN-510

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250



UN-511

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/90-10	56J	109	4.3	452	17.8	2.5	257	567	36	250
120/80-10	63L	119	4.7	446	17.6	2.75	265	584	36	250
130/60-13	53J	123	4.8	490	19.3	3.5	206	454	32	225

**UN-513**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-10	53L	101	4.0	414	16.3	2.5	206	454	36	250
120/70-10	48L	122	4.8	422	16.6	3.5	180	397	32	225

**UN-528****RAIN TYRE**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-12	59L	100	3.9	482	19	2.5	243	536	36	250

**UN-530****RAIN TYRE**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/80-12	65L	122	4.8	490	19.3	2.75	290	639	36	250

**UN-588**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-14	57P	101	4.0	536	21.1	2.5	230	507	32	225

**UN-591**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-10	50L	90	3.5	416	16.4	2.15	190	419	36	250

**UN-7101****WHITE WALL**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-8	4	96	3.8	386	15.2	2.5	170	375	36	250
4.00-8	4	96	3.8	386	15.2	2.5	218	481	36	250
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250



**UN-9815**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250

**UN-9816N**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**WATT-W2**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

**WATT-W5**


SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.82	437	17.2	2.5	195	430	36	250
90/90-10	50J	91	3.54	418	16.4	2.15	190	419	36	250
100/90-10	56J	101	3.97	435	17.1	2.5	224	494	36	250

**Y-100**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

**UN-512****DUAL SPORT**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/90-10	54J	109	4.3	452	17.8	2.5	257	567	36	250
120/90-10	57J	119	4.7	470	18.5	2.75	230	507	36	250
130/90-10	61J	129	5.1	488	19.2	3.0	257	567	36	250

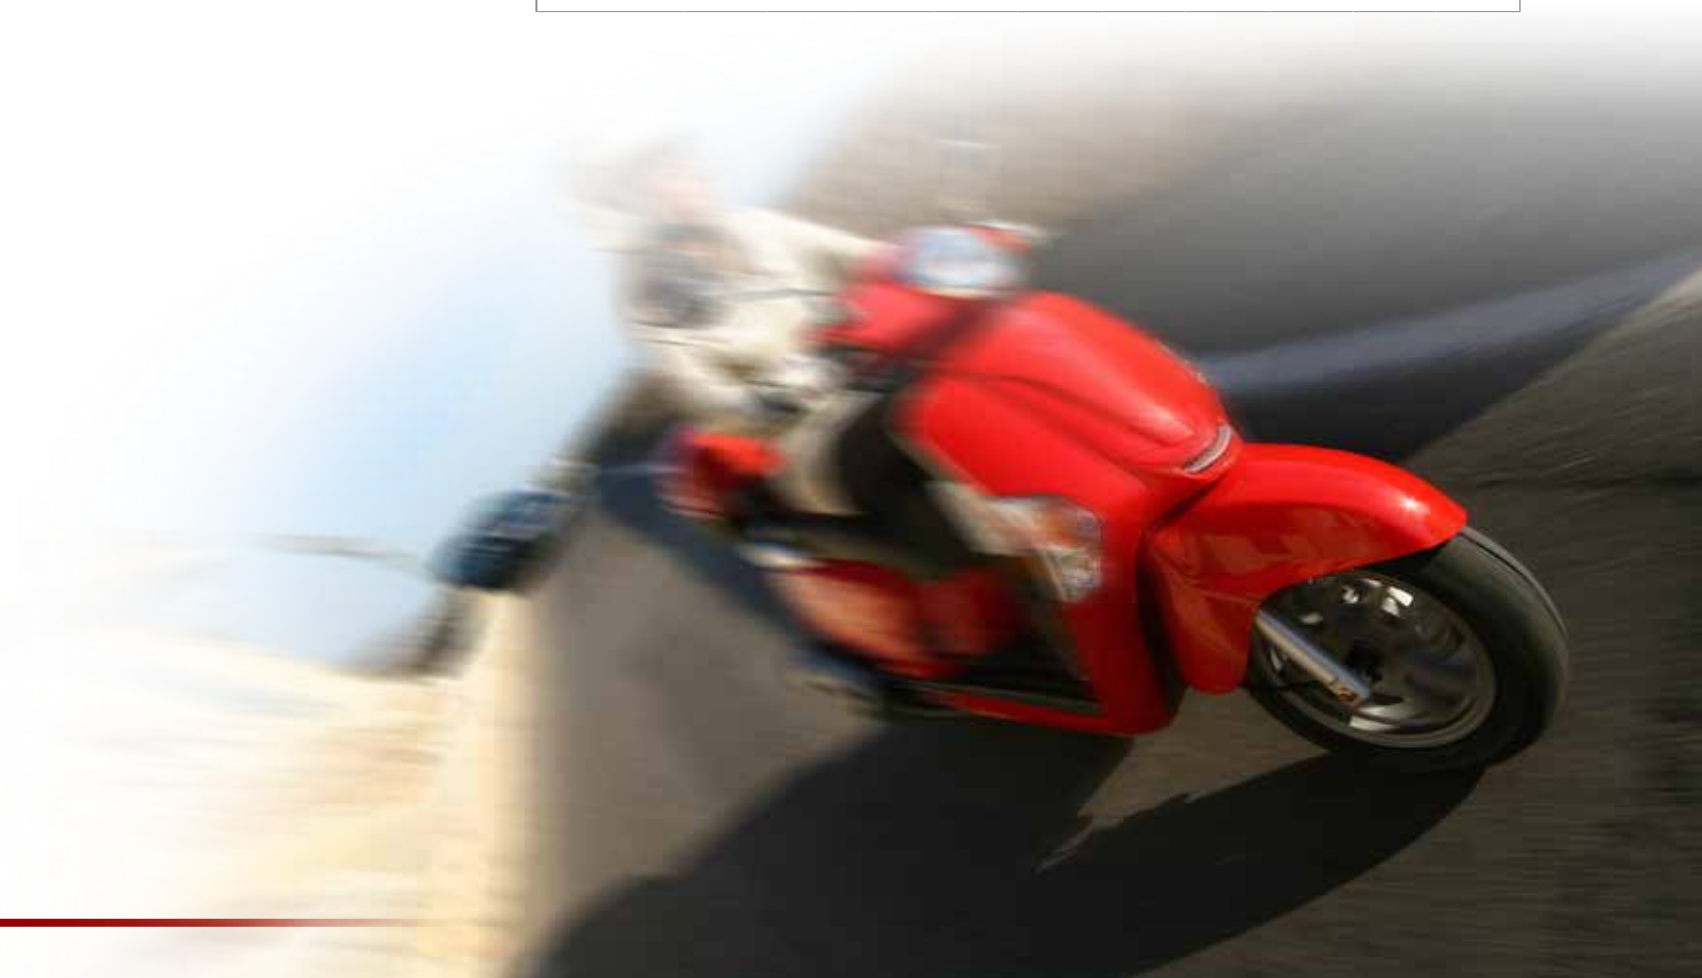

**UN-516**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
110/80-10	58L	109	4.3	430	16.9	2.5	236	520	36	250
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225

**UN-517****WINTER/SNOW TYRE**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225

**UN-526****WINTER/SNOW TYRE**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
130/70-8	42L	128	5.0	380	15.0	3.5	150	330	40	275

**UN-7308**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250

**UN-9813**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
120/70-10	48L	122	4.8	422	16.6	3.5	180	397	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225

**RST UN-7862A****RADIAL STREET**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-10	50L	90	3.5	420	16.5	2.15	190	419	36	250
3.50-10	51L	94	3.7	552	21.7	2.5	195	430	36	250
100/90-10	56L	100	3.9	440	17.3	2.5	224	494	36	250
110/70-12	47L	110	4.3	462	18.2	3	175	386	32	225
120/70-12	51L	121	4.8	475	18.7	3.5	195	430	32	225
130/70-12	56L	130	5.1	490	19.3	3.5	224	494	32	225

**RSP A8****RADIAL SPORT**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-10	50J	91	3.54	418	16.4	2.15	190	419	36	250
100/90-10	56J	101	3.97	435	17.1	2.5	224	494	36	250
3.50-10	51J	97	3.82	437	17.2	2.5	195	430	36	250
110/70-12	47L	104	4.09	458	18.0	3.0	175	386	32	225
120/70-12	51L	116	4.57	475	18.7	3.5	195	430	32	225
130/70-12	56L	128	5.04	490	19.3	3.5	224	494	32	225

RSR A8**RADIAL SPORT RACING**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/90-12	59L	101	3.97	485	19.1	2.5	243	536	36	250
120/80-12	65L	119	4.68	494	19.4	2.75	290	639	36	250

**DT-188**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

**UN-106**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

**UN-166**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/90-16	36P	69	2.7	532	20.9	1.6	125	276	32	225
80/90-16	43P	80	3.1	550	21.7	1.85	155	342	32	225
90/90-16	48P	99	3.9	580	22.8	2.15	180	397	32	225
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

**UN-169**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-14	34P	70	2.8	484	19.1	1.6	118	260	32	225
80/90-14	40P	78	3.1	504	19.8	1.85	140	309	32	225
90/90-14	46P	90	3.5	518	20.4	2.15	170	375	32	225
90/80-17	46P	88	3.5	576	22.7	2.15	170	375	32	225

**UN-300**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/100-14	37P	72	2.8	495	19.5	1.6	128	282	32	225
80/100-14	43P	81	3.2	508	20.0	1.85	155	342	32	225

**UN-558A****RACING**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
80/90-17	44P	78	3.1	580	22.8	1.85	160	353	32	225

**UN-9005**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.50-17	38P	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41P	74	2.9	586	23.1	1.85	145	320	32	225

**UN-9006**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.50-17	38P	68	2.7	568	22.4	1.6	132	291	32	225
80/100-14	43P	80	3.1	516	20.3	1.85	155	342	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.50-18	56P	93	3.7	648	25.5	2.17	224	494	32	225

**UN-9006S**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
80/100-18	47P	80	3.1	617	24.3	1.85	175	386	32	225

**UN-9007**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-17	52P	101	4.0	592	23.3	2.5	200	441	32	225

**UN-9008**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225

**UN-9811**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-16	59P	109	4.3	604	23.8	2.5	243	536	32	225

**UN-9817**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
130/90-15	66P	129	5.1	615	24.2	3.0	265	584	32	225
140/90-15	70H	143	5.6	633	24.9	3.5	335	739	32	225
120/80-16	60P	119	4.7	598	23.5	2.75	250	551	32	225
130/90-16	67P	129	5.1	640	25.2	3.0	307	677	32	225
60/80-17	27P	60	2.4	528	20.8	1.4	97.5	215	32	225
70/80-17	35P	69	2.7	544	21.4	1.6	121	267	32	225
80/80-17	41P	80	3.1	560	22.0	1.85	145	320	32	225
110/70-17	54P	110	4.3	586	23.1	3.0	212	467	32	225
120/80-17	61S	120	4.7	630	24.8	2.75	257	567	32	225
130/70-17	62H	128	5.0	630	24.8	3.5	265	584	32	225
140/60-17	63H	134	5.3	622	24.5	3.75	272	600	32	225
140/70-17	66H	134	5.3	622	24.5	3.75	300	661	32	225
70/80-18	41P	69	2.7	569	22.4	1.6	125	276	32	225
80/80-18	42P	80	3.1	585	23.0	1.85	150	331	32	225
80/90-18	45P	80	3.1	601	23.7	1.85	165	364	32	225
90/80-18	47P	90	3.5	601	23.7	2.15	175	386	32	225
90/90-18	51P	88	3.5	624	24.6	2.15	195	430	32	225
100/80-18	53P	101	4.0	617	24.3	2.5	206	454	32	225
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225





UN-9817N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/90-14	43P	70	2.8	484	19.1	1.6	118	260	32	225
80/90-14	40P	78	3.1	504	19.8	1.85	140	309	32	225
70/90-16	36P	69	2.7	532	20.9	1.6	125	276	32	225
80/90-16	43P	80	3.7	550	21.7	1.85	155	342	32	225
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225
90/80-17	46P	88	3.5	576	22.7	2.15	170	375	32	225
100/80-17	52P	98	3.9	598	23.5	2.5	200	441	32	225



UN-9818

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225



UN-9819

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225



UN-9820

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-16	40P	76	3.0	558	22.0	1.85	140	309	32	225



STREET

UN-173

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
120/70-15	56P	120	4.7	558	22.0	3.5	224	494	32	225
90/90-17	49P	93	3.7	596	23.5	2.15	185	408	32	225
100/90-17	55P	105	4.1	611	24.1	2.5	218	481	32	225



UN-173FR

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/70-16	53P	110	4.3	564	22.2	3.0	206	454	32	225



UN-175

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
130/80-15	63P	130	5.1	594	23.4	3.0	272	600	32	225
110/80-17	57P	110	4.3	612	24.1	2.5	230	507	32	225

**UN-7102**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225
2.50-17	38L	68	2.7	568	22.4	1.6	132	291	32	225
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225

**UN-7103**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-17	41M	74	2.9	586	23.1	1.85	145	320	32	225
3.00-18	47P	80	3.1	627	24.7	1.85	175	386	32	225
2.50-19	41P	66	2.6	624	24.6	1.6	145	320	32	225
2.75-19	43P	78	3.1	646	25.4	1.85	155	342	32	225

**UN-7103A**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-17	45P	80	3.1	602	23.7	1.85	165	364	32	225

**UN-7103****WHITE WALL**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
5.00-15	69P	129	5.1	641	25.2	3.0	325	716	32	225
5.00-16	71P	129	5.1	666	26.2	3.0	345	761	32	225
4.00-18	64P	108	4.3	674	26.5	2.15	280	617	32	225
4.50-18	70P	111	4.4	691	27.2	2.15	335	739	32	225
4.00-19	65P	108	4.3	700	27.6	2.15	290	639	32	225

**UN-7105**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.50-16	52P	93	3.7	598	23.5	2.15	200	441	32	225
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
3.25-18	52P	88	3.5	639	25.2	2.15	200	441	32	225

**UN-7105Q**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225



UN-7106

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.25-17	33L	61	2.4	556	21.9	1.6	115	254	32	225
2.50-17	38L	68	2.7	568	22.4	1.6	132	291	32	225
3.60H-18	64H	93	3.7	648	25.5	2.15	230	507	32	225
3.25-19	54P	88	3.5	665	26.2	2.15	212	467	32	225
3.50-19	57P	93	3.7	675	26.6	2.15	230	507	32	225



UN-7107

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.25-18	52P	88	3.5	639	25.2	2.15	200	441	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225



UN-7108

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.50-17	38M	68	2.7	568	22.4	1.6	132	291	32	225
2.50-18	40P	65	2.6	593	23.3	1.6	140	309	32	225
3.00-21	51P	78	3.1	706	27.8	1.85	195	430	32	225



UN-7108A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225



UN-7108B

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.25-17	33L	61	2.4	556	21.9	1.6	115	254	32	225



UN-7109

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-17	45P	80	3.1	602	23.7	1.85	165	364	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47P	80	3.1	627	24.7	1.85	175	386	32	225



UN-7110

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225
90/90-19	52P	90	3.5	645	25.4	2.15	200	441	32	225
100/90-19	57P	101	4.0	663	26.1	2.5	230	507	32	225





UN-7111

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-16	40M	73	2.9	556	21.9	1.85	140	309	32	225
2.50-17	43M	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41M	74	2.9	586	23.1	1.85	145	320	32	225
3.00-17	45M	88	3.5	616	24.3	1.85	165	364	32	225
2.75-18	42M	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47M	88	3.5	641	25.2	1.85	175	386	32	225



UN-7112

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	50P	80	3.1	602	23.7	1.85	165	364	32	225



UN-7116

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
5.00-15	69P	129	5.1	641	25.2	3.0	325	716	32	225
5.00-16	71P	132	5.2	670	26.4	3.0	345	761	32	225
4.00-19	65P	110	4.3	705	27.8	2.15	290	639	32	225



UN-7860

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
80/100-17	46P	81	3.2	595	23.4	1.85	170	375	32	225
90/90-17	49P	93	3.7	596	23.5	2.15	185	408	32	225
2.75-18	42P	70	2.8	615	24.2	1.85	150	331	32	225



UN-7862

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/90-17	55P	105	4.1	611	24.1	2.5	218	481	32	225
110/80-17	57P	110	4.3	612	24.1	2.5	230	507	32	225
120/80-17	61S	122	4.8	624	24.6	2.75	257	567	32	225
100/90-18	56P	102	4.0	640	25.2	2.5	224	494	32	225



UN-9010W

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
80/100-18	47P	80	3.1	617	24.3	1.85	175	386	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225



UN-9810

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-18 (3.00-18)	51P	90	3.5	619	24.4	2.15	195	430	32	225
100/90-18 (3.25-18)	56P	101	4.0	637	25.1	2.5	224	494	32	225



DUAL SPORT

UN-7301

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
110/90-18	61P	109	4.3	655	25.8	2.5	257	567	32	225
2.75-21	45P	75	3.0	689	27.1	1.85	165	364	32	225

UN-7305

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/100-18	59M	101	4.0	657	25.9	2.5	243	536	32	225
3.50-18	56M	101	4.0	657	25.9	2.5	243	536	32	225

UN-7306

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225
2.75-18	42M	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47M	80	3.1	627	24.7	1.85	175	386	32	225
4.10-18	60M	104	4.1	671	26.4	2.15	280	617	32	225
3.00-19	49M	80	3.1	653	25.7	1.85	185	408	32	225
2.75-21	45M	75	3.0	689	27.1	1.85	165	364	32	225

UN-7309

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225

UN-7311

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225

UN-7312

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
80/100-14	43P	80	3.1	516	20.3	1.85	155	342	32	225
110/90-16	59P	109	4.3	604	23.8	2.5	243	536	32	225
120/90-16	63P	120	4.72	623	24.5	2.75	272	600	32	225
90/90-17	49P	90	3.5	594	23.4	2.15	185	408	32	225
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
120/80-17	61P	119	4.7	624	24.6	2.75	257	567	32	225
120/90-17	64P	119	4.7	648	25.5	2.75	280	617	32	225
2.50-17	38P	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41P	74	2.9	586	23.1	1.85	145	320	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225
120/80-18	62P	119	4.7	649	25.6	2.75	265	584	32	225
90/90-19	51M	90	3.5	645	25.4	2.15	200	441	32	225
90/90-21	54M	90	3.5	695	27.4	2.15	212	467	32	225



UN-7315

WINTER/SNOW TYRE

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-18	42P	75	3.0	613	24.1	1.85	150	331	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225



UN-7321

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/90-17 (4.60-17)	64P	122	4.8	656	25.8	2.75	280	617	32	225
4.60-18	63P	126	5.0	680	26.8	2.75	272	600	32	225
3.00-21	51P	80	3.1	710	28.0	1.85	200	441	32	225



UN-7501

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	45M	82	3.2	610	24.0	1.85	165	364	32	225
3.00-18	47M	82	3.2	635	25.0	1.85	175	386	32	225



UN-9009

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
90/90-19	52P	90	3.5	645	25.4	2.15	200	441	32	225





MOTOCROSS



UN-7302

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
2.75-10	37J	71	2.8	399	15.7	1.75	128	282	36	225



UN-7303

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-10	37J	71	2.8	399	15.7	1.75	128	282	36	225
2.50-12	36J	65	2.6	441	17.4	1.5	125	276	36	225
2.75-12	40M	71	2.8	450	17.7	1.75	140	309	36	225
3.00-12	50J	80	3.1	464	18.3	2.1	132	291	36	225
80/100-12	50J	80	3.1	465	18.3	1.85	190	419	36	225



UN-7307

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
110/100-18	64M	118	4.6	474	18.7	2.5	280	617	32	225
100/90-19	57M	110	4.3	672	26.5	2.5	230	507	32	225
110/90-19	62M	118	4.6	685	27.0	2.5	265	584	32	225
120/90-19	66M	132	5.2	695	27.4	2.75	300	661	32	225



UN-7307F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-21	51M	84	3.3	693	27.3	1.85	195	430	32	225



UN-7310

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.50-10	33J	65	2.6	390	15.4	1.5	115	254	36	225



UN-7314

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
60/100-14	30M	64	2.5	476	18.7	1.4	103	227	32	225
70/100-19	42M	76	3.0	625	24.6	1.6	150	331	32	225



UN-7314F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/100-17	40M	76	3.0	576	22.7	1.6	140	309	32	225



UN-7316

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/100-14	49M	92	3.6	540	21.3	2.15	185	408	32	225
90/100-16	52M	92	3.6	586	23.1	2.15	195	430	32	225



UN-7317

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/90-18	71N	128	5.0	680	26.8	2.75	290	639	32	225



UN-7323

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
100/100-18	59M	101	4.0	657	25.9	2.5	243	536	32	225
120/100-18	68M	120	4.7	697	27.4	2.75	315	694	32	225



UN-7323F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-21	51M	80	3.2	693	27.3	1.85	195	430	32	225



UN-702

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT145/70-6	4	136	5.4	350	13.8	4.5	4	40



UN-704

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT145/70-6	4	136	5.4	350	13.8	4.5	4	40



UN-711

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT19x7.00-8	4	179	7.0	480	18.9	5.5	5	34
AT18x9.50-8	4	244	9.6	455	17.9	8.0	5	34



UN-712

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT18x9.50-8	4	255	10.0	465	18.3	8.0	5	34



UN-713

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD			kgs	lbs	PSI	kPa
		mm	inch	mm	inch					
AT25x8.00-12	4	211	8.3	629	24.8	7.0	153	340	7	48
AT25x10.00-12	4	245	9.6	626	24.6	8.0	153	340	7	48



UN-715

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT20x10.00-9	4	250	9.8	503	19.8	8.0	5	34
AT22x10.00-9	4	256	10.1	543	21.4	8.0	5	34



UN-716

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT20x10.00R9	4	265	10.4	497	19.6	8.0	5	34



UN-717

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
120/60-8	4	116	4.6	338	13.3	4.0	32	225

**UN-718**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
160/40-10	4	148	5.8	390	15.4	4.0	32	225

**UN-719R**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT16x8.00-7	4	180	7.1	385	15.2	5.2	5	34

**UN-722**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT19x7.00-8	4	179	7.0	480	18.9	5.5	5	34
AT21x7.00-10	4	179	7.0	515	20.3	5.5	5	34

**UN-723**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT25x8.00R12	4	203	8.0	635	25.0	6.5	5	34
AT25x10.00R12	4	254	10.0	635	25.0	8.0	5	34
AT26x9.00R12	6	235	9.3	645	25.4	7.0	7	48
AT26x12.00R12	6	304	12.0	640	25.2	9.5	7	48
AT27x9.00R12	6	229	9.0	686	27.0	7.0	5	34
AT27x12.00R12	6	305	12.0	686	27.0	9.5	5	34
AT26x9.00R14	6	231	9.1	645	25.4	7.0	7	48
AT26x11.00R14	6	280	11.0	645	25.4	8.1	7	48
AT29x9.00R14	6	228	9.0	737	29.0	7.0	7	48
AT29x11.00R14	6	279	11.0	737	29.0	9.0	7	48

**UN-724**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT22x7.00-10	4	181	7.1	539	21.2	5.5	5	34
AT22x7.00-11	4	178	7.0	559	22.0	5.5	5	34

**UN-726**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT22x10.00-9	4	253	10.0	549	21.6	8.0	5	34
AT22x10.00-10	4	248	9.8	547	21.5	8.0	5	34

**UN-727**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT21x10.00-8	4	267	10.5	529	20.8	8.0	5	34

**UN-728**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT24x8.00-12	4	217	8.5	592	23.3	7.0	5	34
AT24x10.00-12	4	245	9.6	610	24.0	8.0	5	34

**UN-729**

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
28x10.00R14	8	254	10.0	711	28.0	8	25	172
30x10.00R14	8	251	9.9	775	30.5	8	25	172
32x10.00R14	8	254	10.0	813	32.0	8	25	172
29x10.00R15	8	254	10.0	740	29.1	8	25	172
32x10.00R15	8	254	10.0	813	32.0	8	25	172



ATV & UTV



UN-731

S14 DUNE TYRE

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
28x13.00-14	8	335	13.2	774	30.5	10.5	35	245



UN-731A

S28

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
28x13.00-14	8	335	13.2	774	30.5	10.5	35	245



UN-733

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT16x8.00-7	4	184	7.3	390	15.3	5.2	3	20



UN-735

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT25x8.00-12	4	210	8.4	624	24.7	7.0	5	34
AT25x10.00-12	4	246	9.8	628	24.7	8.0	5	34



UN-736

DUNE TYRE

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
AT28x10.00-14	8	244	9.6	706	27.8	8	10	69

Slick Kart

UN-501

VINTAGE



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
4.10/3.50-4	2	87	3.4	265	10.4	2.5	20	140
11x3.50-5	2	102	4.0	282	11.1	3.0	20	140
11x4.50-5	2	124	4.9	270	10.6	4.5	20	140



UN-503

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
10x4.50-5	4	128	5.0	256	10.1	4.5	20	140



UN-505

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
10x3.60-5	4	120	4.7	246	9.7	4.5	20	140
11x6.00-5	4	182	7.2	268	10.6	6.6	20	140
11x7.10-5	4	198	7.8	282	11.1	6.6	20	140



Slick Kart

UN-505SL

SUPER LIGHT

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
10.5x4.50-6	4	167	6.6	258	10.2	6.6	7	40
11x6.00-6	4	186	7.3	268	10.6	8.0	7	40
11.5x8.00-6	4	256	10.1	270	10.6	10.0	7	40
12x9.00-6	4	258	10.2	276	10.9	10.0	7	40

UN-521

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
12x4.00-5	4	93	3.7	300	11.8	2.5	50	350

UN-524

STUDED TYRE

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
11.5x4.00-5	4	116	4.6	292	11.5	2.5	36	250

UN-556

MINI MOTO

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
110/55R6.5	4	106	4.2	277	10.9	2.5	36	250
90/65R6.5	4	90	3.5	285	11.2	2.5	36	250

Dirt & Rain Kart

UN-506

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
11x5.00-5	4	150	5.9	285	11.2	4.5	20	140

UN-508


SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
12x7.00-6	4	186	7.3	305	12.0	8	20	140
12x8.00-6	4	255	10.0	305	12.0	10	20	140
12x9.00-6	4	258	10.2	305	12.0	10	20	140

UN-519

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
10x4.20-5	4	126	5.0	256	10.1	4.5	20	140

UN-520

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Infl Pressure	
		SW		OD			PSI	kPa
		mm	inch	mm	inch			
11x6.00-5	4	180	7.1	270	10.6	6.6	20	140



UNILLI MOTOR CO., LTD. ACME RUBBER IND. CO., LTD.

Factory1 : No.45, Singong 6th Rd., Tianjhong Township, Changhua County 52046, Taiwan

TEL : +886-4-8760061 FAX : +886-4-8760097

E-mail : unilli-tyre1@unilli.com

Factory2 : No.1-6, Douyuan E. Rd., Pitou Township, Changhua County 52345, Taiwan

TEL : +886-4-8877052 FAX : +886-4-8877349

E-mail : unilli-tyre@unilli.com

www.unilli.com